

# Protest by TC

Protest No: 02

Received At: 2023-07-31 19:16 CEST

## 1. Event Name: 41 Copa del Rey MAPFRE

Protest On: 2023-07-31

Race No: 1-2-3

## 2. Hearing Type

- Protest
- Protest by RC
- Protest by PC
- Protest by TC

- Request to Reopen
- Reopening by PC
- Request for Redress
- Request for Redress by RC

## 3. Protestor

Technical Committee

## 4. Protestees

1. ORC 2 - Alemania GER6533 - PLAN B - CHRISTOPH MANN

## 5. Incident

Time Place: 19.12

Rules: 3.14 OSR

Witnesses:

## 6. Informing Protestee

Hail:

Hail When:

Hail Comment:

Red Flag:

Red Flag Comment

Other:

Other Comment:

## 7. Description Of Incident

Se adjunta informe explicativo del incidente y fotos de la embarcación.



## COPA DEL REY

Del 29 Julio al 5 de Agosto de 2023

### INFORME DE MEDICIÓN 31.07.2023

Los controles de medición se han realizado en base al Reglamento de Regatas a Vela vigente (2021-2024) y el Reglamento Técnico y Competiciones de Cruceros junto con las reglas aplicadas según Instrucciones de Regata (Anexo I).


#### Apunte de seguridad embarcación S/Y PLAN B GER-6533

Tras inspección de medición en el agua se observa que los guardamancebos y candeleros de la embarcación incumplen la normativa vigente de las Offshore Special Regulations (OSR). Así como dicta la regla abajo descrita (Anexo I del presente informe). La embarcación no cumple con las alturas mínimas de los candeleros y guardamancebos instalados en la cubierta de trabajo.

#### 3.14 Pulpits, Stanchions, Lifelines

3.14.1 The perimeter of the deck surrounded by system of lifelines and pulpits as follows:

- a) **Continuous lifelines fixed only at (or near) the bow and stern.** However a gate on each side of a boat is permitted. Except at its end fittings and at gates, the movement of a lifeline in a fore-and-aft direction shall not be constrained. Temporary sleeving shall not modify tension in the lifeline.
- b) **Minimum heights of lifelines and pulpit rails above the working deck and vertical openings:**
  - i. **upper: 600 mm (24")**
  - ii. **intermediate: 230 mm (9")**
  - iii. vertical opening: no greater than 380 mm (15") except that on a boat with a Primary Launch before 1993 where it shall be no greater than 560 mm (22").
  - iv. A boat less than 8.5 m (28') LH may use a single lifeline system with a height between 450 mm (18") and 560 mm (22").
- c) Lifelines permanently supported at intervals of not more than 2.2 m (7'-2 1/2") and shall not pass outboard of supporting stanchions.
- d) Pulpit and stanchion bases permanently installed with pulpits and stanchions mechanically retained in their bases.

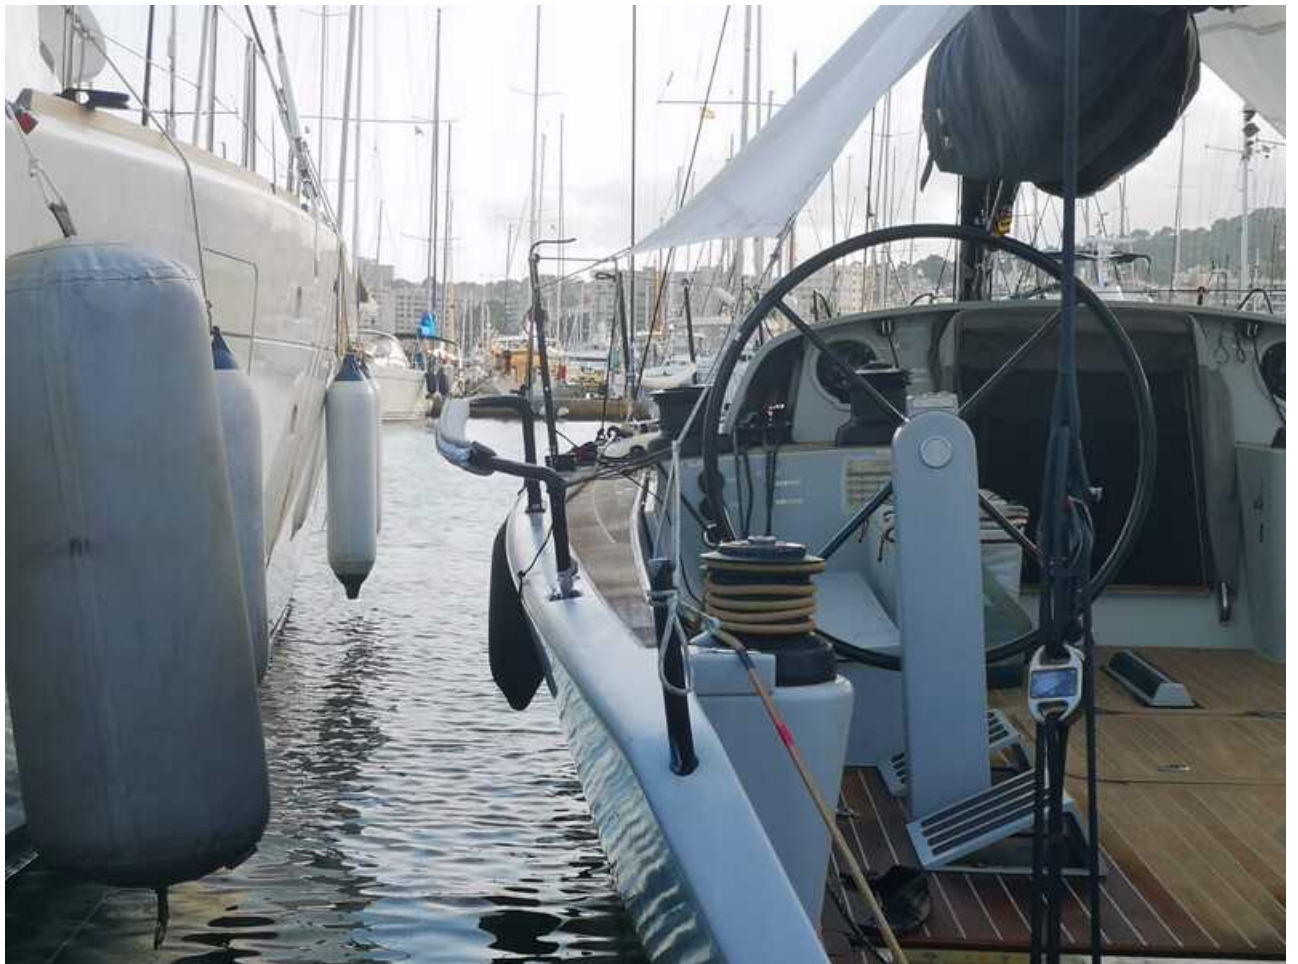

1.jpg 219 KB



3.jpg 201 KB



4.jpg 226 KB



2.jpg 241 KB

## 8. Damage Or Injury

### Attachments